


NPT Threaded Caps

150# Malleable Iron, Galvanized

Inches / Pounds

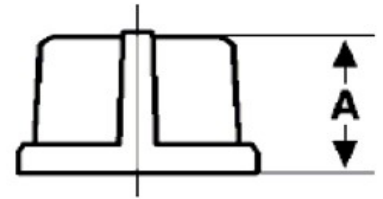

Part #	Size	A	Approximate Weight (in Lbs)
KC.125MIG	1/8	0.53	0.05
KC.25MIG	1/4	0.63	0.07
KC.375MIG	3/8	0.74	0.11
KC.5MIG	1/2	0.87	0.15
KC.75MIG	3/4	0.97	0.22
KC1MIG	1	1.16	0.35
KC1.25MIG	1 1/4	1.28	0.54
KC1.5MIG	1 1/2	1.33	0.68
KC2MIG	2	1.45	0.96
KC2.5MIG	2 1/2	1.70	1.72
KC3MIG	3	1.80	2.55
KC3.5MIG	3 1/2	1.90	3.12
KC4MIG	4	2.08	4.60
KC5MIG	5	2.32	6.42
KC6MIG	6	2.55	9.90
KC8MIG	8	3.20	16.90

****Malleable Castings conform to ASTM A197***

****Malleable Fitting Dimensions conform to ASME B16.3***

****NPT Threads on all fittings conform to ASME B1.20.1***

****Class 150 fittings are UL listed and FM approved at 300 psi***

****Hot-dipped galvanized fittings conform to ASTM A153***

****Hot-dipped galvanized fittings certified to NSF/ANSI 372 and California AB1953 Lead Free***