




Threaded Flange

CLASS 150

Inches / Pounds

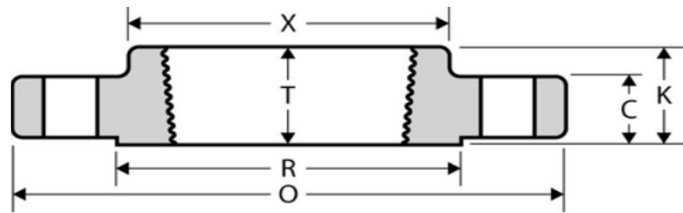

Part #	Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub at Base (X)	Length thru Hub (Y)	Min. Thread Length (T)	Min. Count er Bore (Q)	No. Of Holes	Diam. Of Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
KTF.5	½	3.50	0.44	1.38	1.19	0.62	0.62	—	4	0.62	0.50	2.38	1
KTF.75	¾	3.88	0.50	1.69	1.50	0.62	0.62	—	4	0.62	0.50	2.75	2
KTF1	1	4.25	0.56	2.00	1.94	0.69	0.69	—	4	0.62	0.50	3.12	2
KTF1.25	1 ¼	4.62	0.62	2.50	2.31	0.81	0.81	—	4	0.62	0.50	3.50	3
KTF1.5	1 ½	5.00	0.69	2.88	2.56	0.88	0.88	—	4	0.62	0.50	3.88	3
KTF2	2	6.00	0.75	3.62	3.06	1.00	1.00	—	4	0.75	0.62	4.75	5
KTF2.5	2 ½	7.00	0.88	4.12	3.56	1.12	1.12	—	4	0.75	0.62	5.50	7
KTF3	3	7.50	0.94	5.00	4.25	1.19	1.19	—	4	0.75	0.62	6.00	8
KTF3.5	3 ½	8.50	0.94	5.50	4.81	1.25	1.25	—	8	0.75	0.62	7.00	11
KTF4	4	9.00	0.94	6.19	5.31	1.31	1.31	—	8	0.75	0.62	7.50	13
KTF5	5	10.00	0.94	7.31	6.44	1.44	1.44	—	8	0.88	0.75	8.50	15
KTF6	6	11.00	1.00	8.50	7.56	1.56	1.56	—	8	0.88	0.75	9.50	19
KTF8	8	13.50	1.12	10.62	9.69	1.75	1.75	—	8	0.88	0.75	11.75	30
KTF10	10	16.00	1.19	12.75	12.00	1.94	1.94	—	12	1.00	0.88	14.25	43
KTF12	12	19.00	1.25	15.00	14.38	2.19	2.19	—	12	1.00	0.88	17.00	64

** Dimensions conform to ASTM A/SA-105; ANSI B16.5*