




# Threaded Flange

## CLASS 150, 304 Stainless Steel

Inches / Pounds

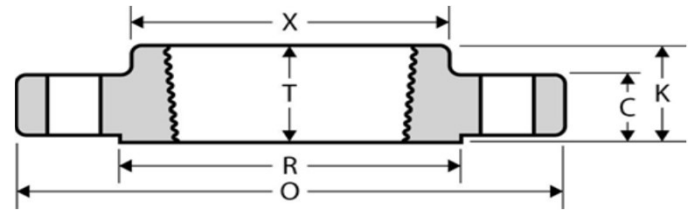

| Part #   | Nominal Pipe Size | Outside Diam. of Flange (O) | Thick. of Flange (C) | Diam. of Raised Face (R) | Diam. of Hub at Base (X) | Length thru Hub (Y) | Min. Thread Length (T) | Min. Count er Bore (Q) | No. Of Holes | Diam. Of Holes | Diam. Of Bolts | Diam. Of Bolt Circle | Approx. Weight (in Lbs.) |
|----------|-------------------|-----------------------------|----------------------|--------------------------|--------------------------|---------------------|------------------------|------------------------|--------------|----------------|----------------|----------------------|--------------------------|
| KTF.5S   | ½                 | 3.50                        | 0.44                 | 1.38                     | 1.19                     | 0.62                | 0.62                   | —                      | 4            | 0.62           | 0.50           | 2.38                 | 1                        |
| KTF.75S  | ¾                 | 3.88                        | 0.50                 | 1.69                     | 1.50                     | 0.62                | 0.62                   | —                      | 4            | 0.62           | 0.50           | 2.75                 | 2                        |
| KTF1S    | 1                 | 4.25                        | 0.56                 | 2.00                     | 1.94                     | 0.69                | 0.69                   | —                      | 4            | 0.62           | 0.50           | 3.12                 | 2                        |
| KTF1.25S | 1 ¼               | 4.62                        | 0.62                 | 2.50                     | 2.31                     | 0.81                | 0.81                   | —                      | 4            | 0.62           | 0.50           | 3.50                 | 3                        |
| KTF1.5S  | 1 ½               | 5.00                        | 0.69                 | 2.88                     | 2.56                     | 0.88                | 0.88                   | —                      | 4            | 0.62           | 0.50           | 3.88                 | 3                        |
| KTF2S    | 2                 | 6.00                        | 0.75                 | 3.62                     | 3.06                     | 1.00                | 1.00                   | —                      | 4            | 0.75           | 0.62           | 4.75                 | 5                        |
| KTF2.5S  | 2 ½               | 7.00                        | 0.88                 | 4.12                     | 3.56                     | 1.12                | 1.12                   | —                      | 4            | 0.75           | 0.62           | 5.50                 | 7                        |
| KTF3S    | 3                 | 7.50                        | 0.94                 | 5.00                     | 4.25                     | 1.19                | 1.19                   | —                      | 4            | 0.75           | 0.62           | 6.00                 | 8                        |
| KTF4S    | 4                 | 9.00                        | 0.94                 | 6.19                     | 5.31                     | 1.31                | 1.31                   | —                      | 8            | 0.75           | 0.62           | 7.50                 | 13                       |
| KTF5S    | 5                 | 10.00                       | 0.94                 | 7.31                     | 6.44                     | 1.44                | 1.44                   | —                      | 8            | 0.88           | 0.75           | 8.50                 | 15                       |
| KTF6S    | 6                 | 11.00                       | 1.00                 | 8.50                     | 7.56                     | 1.56                | 1.56                   | —                      | 8            | 0.88           | 0.75           | 9.50                 | 19                       |

*\* Dimensions conform to ASME B16.5*

*\* Forged stainless steel material conforms to ASME A182*

*\* NPT threads conform to ASME B1.20.1*