


## Slip On Flanges for Tubing– Class 150 Spacing – Light Weight

Dimensions in inches, Weight in LBS

Part #	Tube Size	ID TYPE	O.D.	I.D.	B.H.C. DIA	B.H. DIA	NO. B.H.	THK	WEIGHT
KLW2T	2	Tube	6	2.06	4.75	0.75	4	0.5	3.2
KLW2.5T	2-1/2	Tube	6	2.56	4.75	0.75	4	0.5	3
KLW3T	3	Tube	7	3.06	5.5	0.75	4	0.5	4.2
KLW3.5T	3-1/2	Tube	7	3.57	5.5	0.75	8	0.5	4
KLW4T	4	Tube	9	4.06	7.5	0.75	8	0.5	6.9
KLW5T	5	Tube	10	5.06	8.5	0.88	8	0.5	8
KLW6T	6	Tube	11	6.06	9.5	0.88	8	0.5	9
KLW8T	8	Tube	13.5	8.06	11.75	0.88	8	0.5	12.6
KLW10T	10	Tube	16	10.88	14.25	1	12	0.5	14.6
KLW12T	12	Tube	19	12.06	17	1	12	0.5	22.5
KLW14	14	NA	21	14.19	18.75	1.13	12	0.5	26.5
KLW16	16	NA	23.5	16.19	21.25	1.13	16	0.5	31
KLW18	18	NA	25	18.19	22.75	1.25	16	0.5	32

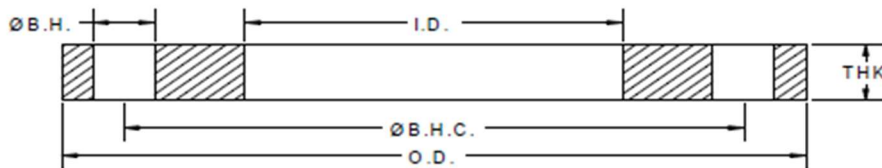

- Flanges designed to slip over outside of mechanical tubing and to be welded in place
- Flange material is carbon steel to AWWA C207-13 specifications

\*\*\*\*\* FLANGES ARE ONLY CLASS 150 SPACING, NOT THICKNESS (1/2 INCH THICK)\*\*\*\*\*

Pipe Fittings Direct  
 690 Craig Rd  
 Edgerton, WI 53534  
 Phone: 608-371-9313  
 Fax: 608-531-2039

E-mail: [sales@pipefittingsdirect.com](mailto:sales@pipefittingsdirect.com)

Lit # 757