




Weld on Reducing Tees

Schedule 40, 316 Stainless Steel

Inches / Pounds

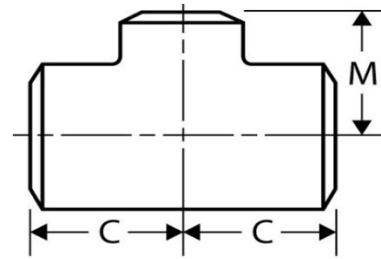

Part #	Nominal Pipe Size	Outside Diam.	Wall Thickness	Inside Diam.	Center to End (C)	Outside Diam.	Wall Thickness	Inside Diam.	Center to End (M)	Pipe Schedule	Approximate Weight (in Lbs.)
KRT.75X.5SS	¾ x ½	1.05	0.113	0.824	1.13	0.840	0.109	0.622	1.13	40	0.3
KRT1X.5SS	1 x ½	1.32	0.133	1.05	1.50	0.840	0.109	0.622	1.50	40	0.5
KRT1X.75SS	1 x ¾	1.32	0.133	1.05	1.50	1.05	0.113	0.824	1.50	40	0.5
KRT1.25X.75SS	1 ¼ x ¾	1.66	0.140	1.38	1.88	1.05	0.113	0.824	1.88	40	1.1
KRT1.25X1SS	1 ¼ x 1	1.66	0.140	1.38	1.88	1.32	0.133	1.05	1.88	40	1.1
KRT1.5X.5SS	1 ½ x ½	1.90	0.145	1.61	2.25	0.84	0.109	0.622	2.25	40	1.6
KRT1.5X.75SS	1 ½ x ¾	1.90	0.145	1.61	2.25	1.05	0.113	0.824	2.25	40	1.6
KRT1.5X1SS	1 ½ x 1	1.90	0.145	1.61	2.25	1.32	0.133	1.05	2.25	40	1.6
KRT1.5X1.25SS	1 ½ x 1 ¼	1.90	0.145	1.61	2.25	1.66	0.140	1.38	2.25	40	1.7
KRT2X.5SS	2 x ¾	2.38	0.154	2.07	2.50	1.05	0.113	0.824	1.75	40	2.4
KRT2X.75SS	2 x ¾	2.38	0.154	2.07	2.50	1.05	0.113	0.824	1.75	40	2.4
KRT2X1SS	2 x 1	2.38	0.154	2.07	2.50	1.32	0.133	1.05	2.00	40	2.4
KRT2X1.25SS	2 x 1 ¼	2.38	0.154	2.07	2.50	1.66	0.140	1.38	2.25	40	2.4
KRT2X1.5SS	2 x 1 ½	2.38	0.154	2.07	2.50	1.90	0.145	1.61	2.38	40	2.5
KRT2.5X1SS	2 ½ x 1	2.88	0.203	2.45	3.00	1.32	0.133	1.05	2.25	40	4.1
KRT2.5X1.5SS	2 ½ x 1 ½	2.88	0.203	2.47	3.00	1.90	0.145	1.61	2.63	40	4.2
KRT2.5X2SS	2 ½ x 2	2.88	0.203	2.47	3.00	2.38	0.154	2.01	2.75	40	4.3
KRT3X1SS	3 x 1	3.50	0.216	3.07	3.38	1.315	0.133	1.05	2.63	40	6.1
KRT3X1.25SS	3 x 1 ¼	3.50	0.216	3.07	3.38	1.66	0.140	1.38	2.75	40	6.2
KRT3X1.5SS	3 x 1 ½	3.50	0.216	3.07	3.38	1.90	0.145	1.61	2.88	40	6.2
KRT3X2SS	3 x 2	3.50	0.216	3.07	3.38	2.38	0.154	2.07	3.00	40	6.4
KRT3X2.5SS	3 x 2 ½	3.50	0.216	3.07	3.38	2.88	0.203	2.47	3.25	40	6.5
KRT4X1.5SS	4 x 1 ½	4.50	0.237	4.03	4.13	1.90	0.145	1.61	3.38	40	9.7
KRT4X2SS	4 x 2	4.50	0.237	4.03	4.13	2.38	0.154	2.07	3.25	40	9.8
KRT4X2.5SS	4 x 2 ½	4.50	0.237	4.03	4.13	2.875	0.203	2.47	3.75	40	10.0
KRT4X3SS	4 x 3	4.50	0.237	4.03	4.13	3.50	0.216	3.07	3.88	40	10.2
KRT5X3SS	5 x 3	5.56	0.258	5.05	4.88	3.50	0.216	3.07	4.38	40	17.8
KRT5X4SS	5 x 4	5.56	0.258	5.05	4.88	4.50	0.237	4.03	4.63	40	18.6
KRT6X2SS	6 x 2	6.62	0.280	6.07	5.63	2.38	0.258	2.07	4.75	40	20.3
KRT6X2.5SS	6 x 2 ½	6.62	0.280	6.07	5.63	2.88	0.237	2.47	4.75	40	20.3
KRT6X3SS	6 x 3	6.62	0.280	6.07	5.63	3.50	0.226	3.07	4.88	40	26.3
KRT6X4SS	6 x 4	6.62	0.280	6.07	5.63	4.50	0.203	4.026	5.13	40	21.3
KRT6X5SS	6 x 5	6.62	0.280	6.07	5.63	5.62	0.154	5.05	5.38	40	21.8

* Material conforms to ASTM A403 Grade 316/316L, ASTM A960, MSS SP-43

* Dimensions conform to ASME B16.9 (except Wall) and MSS SP-43