




# Slip-On Flange

## CLASS 300

Inches / Pounds

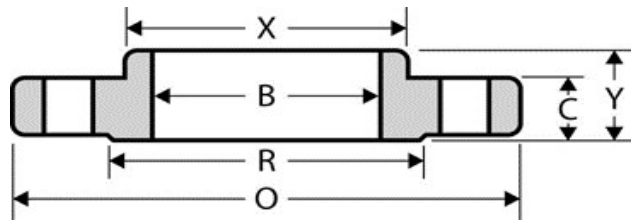

Part #	Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub at Base (X)	Length thru Hub (Y)	Diam. Of Bore (B)	No. of Bolt Holes	Diam. Of Bolt Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
K3FSO.5	1/2	3.75	0.56	1.38	1.50	0.88	0.88	4	0.62	0.50	2.62	2
K3FSO.75	3/4	4.62	0.62	1.69	1.88	1.00	1.09	4	0.75	0.62	3.25	3
K3FSO1	1	4.88	0.69	2.00	2.12	1.06	1.36	4	0.75	0.62	3.50	3
K3FSO1.25	1 1/4	5.25	0.75	2.50	2.50	1.06	1.70	4	0.75	0.62	3.88	4
K3FSO1.5	1 1/2	6.12	0.81	2.88	2.75	1.19	1.95	4	0.88	0.75	4.50	6
K3FSO2	2	6.50	0.88	3.62	3.31	1.31	2.44	8	0.75	0.62	5.00	7
K3FSO2.5	2 1/2	7.50	1.00	4.12	3.94	1.50	2.94	8	0.88	0.75	5.88	10
K3FSO3	3	8.25	1.12	5.00	4.62	1.69	3.57	8	0.88	0.75	6.62	13
K3FSO3.5	3-1/2	9.00	1.19	5.50	5.25	1.75	4.07	8	0.88	0.75	7.25	17
K3FSO4	4	10.00	1.25	6.19	5.75	1.88	4.57	8	0.88	0.75	7.88	22
K3FSO5	5	11.00	1.38	7.31	7.00	2.00	5.66	8	0.88	0.75	9.25	28
K3FSO6	6	12.50	1.44	8.50	8.12	2.06	6.72	12	0.88	0.75	10.62	39
K3FSO8	8	15.00	1.62	10.62	10.25	2.44	8.72	12	1.00	0.88	13.00	58
K3FSO10	10	17.50	1.88	12.75	12.62	2.62	10.88	16	1.12	1.00	15.25	81
K3FSO12	12	20.50	2.00	15.00	14.75	2.88	12.88	16	1.25	1.12	17.75	115
K3FSO14	14	23.00	2.12	16.25	16.75	3.00	14.14	20	1.25	1.12	20.25	165
K3FSO16	16	25.50	2.25	18.50	19.00	3.25	16.16	20	1.38	1.25	22.50	190
K3FSO18	18	28	2.38	21	21	3.5	18.18	24	1.38	1.25	24.75	250
K3FSO20	20	30.5	2.5	23	23.12	3.75	20.2	24	1.38	1.25	27	315
K3FSO24	24	36	2.75	27.25	27.62	4.19	24.5	24	1.62	1.5	32	475

**\* Dimensions conform to ANSI B16.5**

**\* Material conforms to ASTM A/SA-105**