




# Hex Bushings, Class 3000

## Forged 304 Stainless Steel

### Inches / Pounds

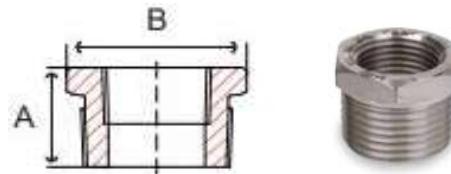

Part #	Size	A (length)	B (hex width)	Approximate Weight (in Lbs.)
K3HB.25X.125S	1/4 x 1/8	0.56	0.62	0.02
K3HB.375X.125S	3/8 x 1/8	0.66	0.69	0.02
K3HB.375X.25S	3/8 x 1/4	0.66	0.69	0.02
K3HB.5X.125S	1/2 x 1/8	0.75	0.88	0.06
K3HB.5X.25S	1/2 x 1/4	0.75	0.88	0.06
K3HB.5X.375S	1/2 x 3/8	0.75	0.88	0.06
K3HB.75X.125S	3/4 x 1/8	0.84	1.06	0.10
K3HB.75X.25S	3/4 x 1/4	0.84	1.06	0.10
K3HB.75X.375S	3/4 x 3/8	0.84	1.06	0.10
K3HB.75X.5S	3/4 x 1/2	0.84	1.06	0.10
K3HB1X.125S	1 x 1/8	1.00	1.38	0.20
K3HB1X.25S	1 x 1/4	1.00	1.38	0.20
K3HB1X.375S	1 x 3/8	1.00	1.38	0.20
K3HB1X.5S	1 x 1/2	1.00	1.38	0.20
K3HB1X.75S	1 x 3/4	1.00	1.38	0.20
K3HB1.25X.125S	1 1/4 x 1/8	1.09	1.75	0.84
K3HB1.25X.375S	1 1/4 x 3/8	1.09	1.75	0.30
K3HB1.25X.5S	1 1/4 x 1/2	1.09	1.75	0.50
K3HB1.25X.75S	1 1/4 x 3/4	1.09	1.75	0.50
K3HB1.25X1S	1 1/4 x 1	1.09	1.75	0.50
K3HB1.5X.125S	1 1/2 x 1/8	1.12	2.00	1.30
K3HB1.5X.25S	1 1/2 x 1/4	1.12	2.00	1.30
K3HB1.5X.375S	1 1/2 x 3/8	1.12	2.00	1.30
K3HB1.5X.5S	1 1/2 x 1/2	1.12	2.00	1.00
K3HB1.5X.75S	1 1/2 x 3/4	1.12	2.00	0.80
K3HB1.5X1S	1 1/2 x 1	1.12	2.00	0.70
K3HB1.5X1.25S	1 1/2 x 1 1/4	1.12	2.00	0.70
K3HB2X.25S	2 x 1/4	1.22	2.50	0.80
K3HB2X.375S	2 x 3/8	1.22	2.50	1.80
K3HB2X.5S	2 x 1/2	1.22	2.50	1.70
K3HB2X.75S	2 x 3/4	1.22	2.50	1.60
K3HB2X1S	2 x 1	1.22	2.50	1.50
K3HB2X1.25S	2 x 1 1/4	1.22	2.50	0.90
K3HB2X1.5S	2 x 1 1/2	1.22	2.50	0.90


(continued on  
next page)



# Hex Bushings, Class 3000

## Forged 304 Stainless Steel

### Inches / Pounds

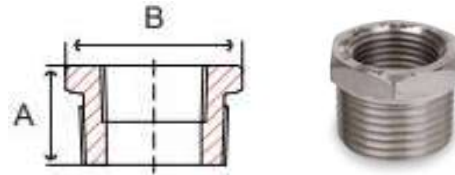

Part #	Size	A (length)	B (hex width)	Approximate Weight (in Lbs.)
K3HB2.5X.5S	2½ x ½	1.44	3.00	1.10
K3HB2.5X.75S	2½ x ¾	1.44	3.00	1.10
K3HB2.5X1S	2½ x 1	1.44	3.00	1.10
K3HB2.5X1.25S	2½ x 1¼	1.44	3.00	1.10
K3HB2.5X1.5S	2½ x 1½	1.44	3.00	1.30
K3HB2.5X2S	2½ x 2	1.44	3.00	1.30
K3HB3X1S	3 x 1	1.53	3.50	5.00
K3HB3X1.25S	3 x 1¼	1.53	3.50	3.40
K3HB3X1.5S	3 x 1½	1.53	3.50	3.10
K3HB3X2S	3 x 2	1.53	3.50	2.70

***\*Forged 304 Stainless Steel conforms to ASME A182***

***\*Dimensions conform to ASME B16.11***

***\*NPT Threads on all fittings conform to ASME B1.20.1***