




Threaded Reducing Tees

Class 150, Malleable Iron - Galvanized

Inches / Pounds




Part #	NPT Thread Sizes (inch)	Run 1 NPT Size	Run 2 NPT Size	Branch NPT Size	End to Center Length (A)	End to Center Length (B)	End to Center Length (C)	Approximate Weight (in Lbs.)
KRT.5X.5.25G	1/2 x 1/2 x 1/4	1/2	1/2	1/4	0.97	0.97	0.98	0.2453
KRT.5X.25X.5G	1/2 x 1/4 x 1/2	1/2	1/4	1/2	1.12	0.97	1.12	0.2704
KRT.5X.5X.38G	1/2 x 1/2 x 3/8	1/2	1/2	3/8	1.04	1.04	1.03	0.2755
KRT.5X.38X.5G	1/2 x 3/8 x 1/2	1/2	3/8	1/2	1.12	1.03	1.12	0.2909
KRT.75X.75X.25G	3/4 x 3/4 x 1/4	3/4	3/4	1/4	1.12	1.12	1.12	0.3641
KRT.75X.75X.38G	3/4 x 3/4 x 3/8	3/4	3/4	3/8	1.12	1.12	1.13	0.4011
KRT.75X.75X.5G	3/4 x 3/4 x 1/2	3/4	3/4	1/2	1.20	1.20	1.22	0.4509
KRT.75X.5X.5G	3/4 x 1/2 x 1/2	3/4	1/2	1/2	1.20	1.12	1.22	0.3936
KRT.75X.5X.75G	3/4 x 1/2 x 3/4	3/4	1/2	3/4	1.31	1.22	1.31	0.4591
KRT.75X.5X1G	3/4 x 1/2 x 1	3/4	1/2	1	1.45	1.36	1.37	0.5792
KRT1X1.X.25G	1 x 1 x 1/4	1	1	1/4	1.12	1.12	1.25	0.5506
KRT1X1X.38G	1 x 1 x 3/8	1	1	3/8	1.18	1.18	1.27	0.5924
KRT1X1X.5G	1 x 1 x 1/2	1	1	1/2	1.26	1.26	1.36	0.6385
KRT1X.5X.5G	1 x 1/2 x 1/2	1	1/2	1/2	1.26	1.12	1.36	0.5102
KRT1X.5X.75G	1 x 1/2 x 3/4	1	1/2	3/4	1.37	1.22	1.45	0.5911
KRT1X.5X1G	1 x 1/2 x 1	1	1/2	1	1.50	1.36	1.50	0.6892
KRT1X1X.75G	1 x 1 x 3/4	1	1	3/4	1.38	1.31	1.45	0.6934
KRT1X.75X.5G	1 x 3/4 x 1/2	1	3/4	1/2	1.50	1.45	1.50	0.5625
KRT1X.75X.75G	1 x 3/4 x 3/4	1	3/4	3/4	1.38	1.31	1.45	0.6275
KRT1X.75X1G	1 x 3/4 x 1	1	3/4	1	1.50	1.45	1.50	0.7416
KRT1.25X1.25X.38G	1-1/4 x 1-1/4 x 3/8	1-1/4	1-1/4	3/8	1.26	1.26	1.44	0.7908
KRT1.25X1.25X.5G	1-1/4 x 1-1/4 x 1/2	1-1/4	1-1/4	1/2	1.34	1.34	1.53	0.8816
KRT1.25X.5X.75G	1-1/4 x 1/2 x 3/4	1-1/4	1/2	3/4	1.45	1.26	1.53	0.6791
KRT1.25X.5X1G	1-1/4 x 1/2 x 1	1-1/4	1/2	1	1.58	1.36	1.67	0.8150
KRT1.25X.5X1.25G	1-1/4 x 1/2 x 1-1/4	1-1/4	1/2	1-1/4	1.75	1.53	1.75	0.9504
KRT1.25X1.25X.75G	1-1/4 x 1-1/4 x 3/4	1-1/4	1-1/4	3/4	1.45	1.45	1.62	0.9506
KRT1.25X.75X.5G	1-1/4 x 3/4 x 1/2	1-1/4	3/4	1/2	1.34	1.12	1.53	0.7853
KRT1.25X.75X.75G	1-1/4 x 3/4 x 3/4	1-1/4	3/4	3/4	1.45	1.31	1.62	0.7461
KRT1.25X.75X1G	1-1/4 x 3/4 x 1	1-1/4	3/4	1	1.58	1.45	1.67	0.8750
KRT1.25X.75X1.25G	1-1/4 x 3/4 x 1-1/4	1-1/4	3/4	1-1/4	1.75	1.62	1.75	0.9995
KRT1.25X1.25X1G	1-1/4 x 1-1/4 x 1	1-1/4	1-1/4	1	1.58	1.58	1.67	1.0548
KRT1.25X1X.5G	1-1/4 x 1 x 1/2	1-1/4	1	1/2	1.34	1.26	1.53	0.7549
KRT1.25X1X.75G	1-1/4 x 1 x 3/4	1-1/4	1	3/4	1.45	1.38	1.63	0.8576
KRT1.25X1X1G	1-1/4 x 1 x 1	1-1/4	1	1	1.58	1.50	1.69	0.9832

(CONTINUED ON NEXT PAGE)

Threaded Reducing Tees

Class 150, Malleable Iron - Galvanized

Inches / Pounds




Part #	NPT Thread Sizes (inch)	Run 1 NPT Size	Run 2 NPT Size	Branch NPT Size	End to Center Length (A)	End to Center Length (B)	End to Center Length (C)	Approximate Weight (in Lbs.)
KRT1.25X1X1.25G	1-1/4 x 1 x 1-1/4	1-1/4	1	1-1/4	1.75	1.69	1.75	1.1009
KRT1.5X1.5X.5G	1-1/2 x 1-1/2 x 1/2	1-1/2	1-1/2	1/2	1.41	1.41	1.66	0.7456
KRT1.5X.5X.5G	1-1/2 x 1/2 x 1/2	1-1/2	1/2	1/2	1.35	1.08	1.67	0.7456
KRT1.5X.5X.75G	1-1/2 x 1/2 x 3/4	1-1/2	1/2	3/4	1.56	1.18	1.80	0.8924
KRT1.5X.5X1.5G	1-1/2 x 1/2 x 1-1/2	1-1/2	1/2	1-1/2	1.94	1.66	1.94	1.2413
KRT1.5X1.5X.75G	1-1/2 x 1-1/2 x 3/4	1-1/2	1-1/2	3/4	1.52	1.52	1.75	1.1558
KRT1.5X.75X.75G	1-1/2 x 3/4 x 3/4	1-1/2	3/4	3/4	1.55	1.35	1.77	0.8646
KRT1.5X.75X1G	1-1/2 x 3/4 x 1	1-1/2	3/4	1	1.82	1.35	1.88	1.0324
KRT1.5X.75X1.25G	1-1/2 x 3/4 x 1-1/4	1-1/2	3/4	1-1/4	1.94	1.66	1.88	1.2184
KRT1.5X.75X1.5G	1-1/2 x 3/4 x 1-1/2	1-1/2	3/4	1-1/2	1.94	1.75	1.94	1.2911
KRT1.5X1.5X1G	1-1/2 x 1-1/2 x 1	1-1/2	1-1/2	1	1.65	1.65	1.8	1.3226
KRT1.5X1X1G	1-1/2 x 1 x 1	1-1/2	1	1	1.65	1.5	1.8	1.1188
KRT1.5X1X1.25G	1-1/2 x 1 x 1-1/4	1-1/2	1	1-1/4	1.82	1.67	1.88	1.2323
KRT1.5X1X1.5G	1-1/2 x 1 x 1-1/2	1-1/2	1	1-1/2	1.94	1.8	1.94	1.3579
KRT1.5X1.5X1.25G	1-1/2 x 1-1/2 x 1-1/4	1-1/2	1-1/2	1-1/4	1.82	1.82	1.88	1.4403
KRT1.5X1.25X.5G	1-1/2 x 1-1/4 x 1/2	1-1/2	1-1/4	1/2	1.41	1.34	1.66	0.9792
KRT1.5X1.25X.75G	1-1/2 x 1-1/4 x 3/4	1-1/2	1-1/4	3/4	1.52	1.45	1.75	1.0361
KRT1.5X1.25X1G	1-1/2 x 1-1/4 x 1	1-1/2	1-1/4	1	1.65	1.58	1.8	1.2159
KRT1.5X1.25X1.25G	1-1/2 x 1-1/4 x 1-1/4	1-1/2	1-1/4	1-1/4	1.82	1.75	1.88	1.3270
KRT1.5X1.25X1.5G	1-1/2 x 1-1/4 x 1-1/2	1-1/2	1-1/4	1-1/2	1.94	1.88	1.94	1.4505
KRT1.5X1.25X2G	1-1/2 x 1-1/4 x 2	1-1/2	1-1/4	2	2.16	2.1	2.02	1.8461
KRT2X2X.5G	2 x 2 x 1/2	2	2	1/2	1.49	1.49	1.88	1.5459
KRT2X.5X2G	2 x 1/2 x 2	2	1/2	2	2.25	1.88	2.25	2.0420
KRT2X2X.75G	2 x 2 x 3/4	2	3/4	3/4	1.6	1.6	1.97	1.6698
KRT2X.75X2G	2 x 3/4 x 2	2	3/4	2	2.25	1.97	2.25	1.9990
KRT2X2X.5G	2 x 2 x 1/2	2	2	1	1.73	1.73	2.02	1.5459
KRT2X1X1G	2 x 1 x 1	2	1	1	1.78	1.45	2.08	1.4009
KRT2X1X1.5G	2 x 1 x 1-1/2	2	1	1-1/2	2.1	1.88	2.18	1.7255
KRT2X2X1.25G	2 x 2 x 1-1/4	2	2	1-1/4	1.9	1.9	2.1	1.9922

(CONTINUED ON NEXT PAGE)

Threaded Reducing Tees

Class 150, Malleable Iron - Galvanized
Inches / Pounds

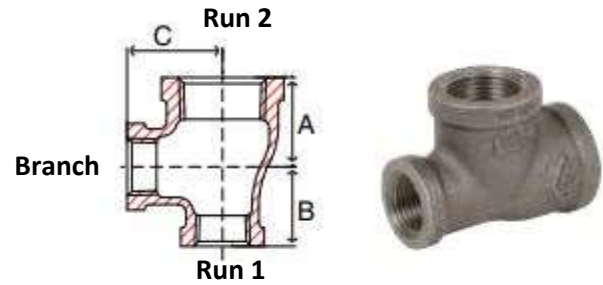

Part #	NPT Thread Sizes (inch)	Run 1 NPT Size	Run 2 NPT Size	Branch NPT Size	End to Center Length (A)	End to Center Length (B)	End to Center Length (C)	Approximate Weight (in Lbs.)
KRT2X1.25X1G	2 x 1-1/4 x 1	2	1-1/4	1	1.78	1.65	2.1	1.4564
KRT2X1.25X1.25G	2 x 1-1/4 x 1-1/4	2	1-1/4	1-1/4	1.9	1.75	2.1	1.6415
KRT2X1.25X2G	2 x 1-1/4 x 2	2	1-1/4	2	2.25	2.1	2.25	2.1601
KRT2X2X1.5G	2 x 2 x 1-1/2	2	2	1-1/2	2.02	2.02	2.16	2.1394
KRT2X1.5X.75G	2 x 1-1/2 x 3/4	2	1-1/2	3/4	1.6	1.52	1.97	1.4443
KRT2X1.5X1G	2 x 1-1/2 x 1	2	1-1/2	1	1.73	1.65	2.02	1.5864
KRT2X1.5X1.25G	2 x 1-1/2 x 1-1/4	2	1-1/2	1-1/4	1.9	1.82	2.1	1.7647
KRT2X1.5X1.5G	2 x 1-1/2 x 1-1/2	2	1-1/2	1-1/2	2.02	1.94	2.16	1.8835
KRT2X1.5X2G	2 x 1-1/2 x 2	2	1-1/2	2	2.25	2.16	2.25	2.2554
KRT2.5X2.5X.5G	2-1/2 x 2-1/2 x 1/2	2-1/2	2-1/2	1/2	1.65	1.65	2.27	2.6239
KRT2.5X2.5X.75G	2-1/2 x 2-1/2 x 3/4	2-1/2	2-1/2	3/4	1.74	1.74	2.32	2.6715
KRT2.5X2.5X1G	2-1/2 x 2-1/2 x 1	2-1/2	2-1/2	1	1.87	1.87	2.37	2.9249
KRT2.5X2.5X1.25G	2-1/2 x 2-1/2 x 1-1/4	2-1/2	2-1/2	1-1/4	2.04	2.04	2.45	3.0911
KRT2.5X2.5X1.5G	2-1/2 x 2-1/2 x 1-1/2	2-1/2	2-1/2	1-1/2	2.16	2.16	2.51	3.2981
KRT2.5X1.5X2G	2-1/2 x 1-1/2 x 2	2-1/2	1-1/2	2	2.39	2.16	2.6	2.9626
KRT2.5X1.5X2.5G	2-1/2 x 1-1/2 x 2-1/2	2-1/2	1-1/2	2-1/2	2.7	2.51	2.7	3.7893
KRT3X3X.75G	3 x 3 x 3/4	3	3	3/4	1.87	1.87	2.61	3.8103
KRT3X3X1G	3 x 3 x 1	3	3	1	2	2	2.66	4.0388
KRT3X3X1.5G	3 x 3 x 1-1/2	3	3	1-1/2	2.29	2.29	2.8	4.4611
KRT3X3X2G	3 x 3 x 2	3	3	2	2.52	2.52	2.8	5.0172
KRT3X2X2G	3 x 2 x 2	3	2	2	2.52	2.25	2.89	4.0955
KRT4X4X1.5G	4 x 4 x 1-1/2	4	4	1-1/2	2.51	2.51	3.32	7.1313
KRT4X4X2.5G	4 x 4 x 2-1/2	4	4	2-1/2	3.05	3.05	3.51	8.6998
KRT4X4X3G	4 x 4 x 3	4	4	3	3.3	3.3	3.6	9.5226

* Castings conform to ASTM A197

* Dimensions conform to ASME 16.3

* Threading per ASME B1.20.1

* UL Listed and FM Approved at 300 PSI

* Hot dipped galvanized conforms to ASTM A153