




Threaded Reducing Tees

Class 125, Bronze

Inches / Pounds

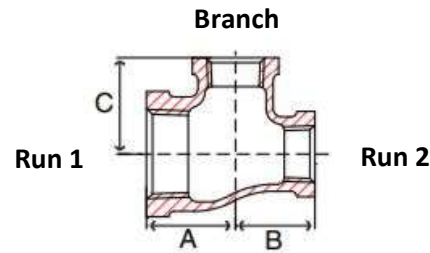

Part #	NPT Thread Sizes (inch)	Run 1 NPT Size	Run 2 NPT Size	Branch NPT Size	End to Center Length (A)	End to Center Length (B)	End to Center Length (C)	Approximate Weight (in Lbs.)
KRT.38X.38X.25B	3/8 x 3/8 x 1/4	3/8	3/8	1/4	0.75	0.75	0.78	0.21
KRT.5X.5X.18B	1/2 x 1/2 x 1/8	1/2	1/2	1/8	0.87	0.87	0.87	0.23
KRT.5X.5.25B	1/2 x 1/2 x 1/4	1/2	1/2	1/4	0.87	0.87	0.87	0.35
KRT.5X.5X.38B	1/2 x 1/2 x 3/8	1/2	1/2	3/8	0.93	0.93	0.90	0.43
KRT.75X.75X.25B	3/4 x 3/4 x 1/4	3/4	3/4	1/4	1.00	1.00	1.00	0.45
KRT.75X.75X.38B	3/4 x 3/4 x 3/8	3/4	3/4	3/8	1.00	1.00	1.00	0.46
KRT.75X.75X.5B	3/4 x 3/4 x 1/2	3/4	3/4	1/2	1.08	1.08	1.11	0.58
KRT.75X.5X.5B	3/4 x 1/2 x 3/4	3/4	1/2	1/2	1.08	1.01	1.11	0.53
KRT.75X.5X.75B	3/4 x 1/2 x 3/4	3/4	1/2	3/4	1.18	1.11	1.18	0.59
KRT1X1X.25B	1 x 1 x 1/4	1	1	1/4	1.12	1.12	1.13	0.63
KRT1X1X.38B	1 x 1 x 3/8	1	1	3/8	1.12	1.12	1.13	0.67
KRT1X1X.5B	1 x 1 x 1/2	1	1	1/2	1.20	1.20	1.24	0.83
KRT1X.5X.75B	1 x 1/2 x 3/4	1	1/2	3/4	1.30	1.11	1.31	0.60
KRT1X.5X1B	1 x 1/2 x 1	1	1/2	1	1.43	1.24	1.43	0.67
KRT1X1X.75B	1 x 1 x 3/4	1	1	3/4	1.30	1.18	1.31	0.72
KRT1X.75X.5B	1 x 3/4 x 1/2	1	3/4	1/2	1.20	1.08	1.24	0.89
KRT1X.75X.75B	1 x 3/4 x 3/4	1	3/4	3/4	1.30	1.18	1.31	0.80
KRT1X.75X1B	1 x 3/4 x 1	1	3/4	1	1.43	1.31	1.43	0.85
KRT1.25X1.25X.5B	1-1/4 x 1-1/4 x 1/2	1-1/4	1-1/4	1/2	1.29	1.29	1.41	0.90
KRT1.25X1.25X.75B	1-1/4 x 1-1/4 x 3/4	1-1/4	1-1/4	3/4	1.39	1.39	1.48	0.82
KRT1.25X1.25X1B	1-1/4 x 1-1/4 x 1	1-1/4	1-1/4	1	1.52	1.52	1.60	1.21
KRT1.25X1X.5B	1-1/4 x 1 x 1/2	1-1/4	1	1/2	1.39	1.30	1.48	1.26
KRT1.5X1.5X.5B	1-1/2 x 1-1/2 x 1/2	1-1/2	1-1/2	1/2	1.32	1.32	1.53	1.39
KRT1.5X1.5X.75B	1-1/2 x 1-1/2 x 3/4	1-1/2	1-1/2	3/4	1.42	1.42	1.60	1.25
KRT1.5X1.5X1B	1-1/2 x 1-1/2 x 1	1-1/2	1-1/2	1	1.55	1.55	1.72	1.71
KRT1.5X1.5X1.25B	1-1/2 x 1-1/2 x 1-1/4	1-1/2	1-1/2	1-1/4	1.72	1.72	1.81	1.71

(CONTINUED ON NEXT PAGE)

***Bronze castings conform to ASTM B62, UNS Alloy C83600**

***Dimensions conform to ASME B16.5**


***NPT Threads on all fittings conform to ASME B1.20.1**

***Fittings conform to AWWA C800**

Threaded Reducing Tees

Class 125, Bronze

Inches / Pounds

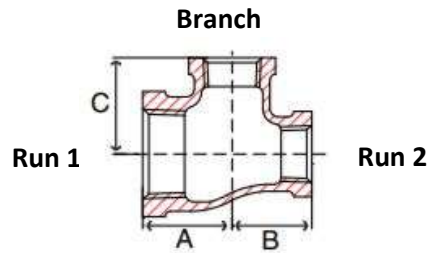

Part #	NPT Thread Sizes (inch)	Run 1 NPT Size	Run 2 NPT Size	Branch NPT Size	End to Center Length (A)	End to Center Length (B)	End to Center Length (C)	Approximate Weight (in Lbs.)
KRT2X2X.5B	2 x 2 x 1/2	2	2	1/2	1.47	1.47	1.84	1.82
KRT2X2X.75B	2 x 2 x 3/4	2	2	3/4	1.47	1.47	1.84	1.98
KRT2X2X1B	2 x 2 x 1	2	2	1	1.59	1.59	1.95	2.08
KRT2X2X1.25B	2 x 2 x 1-1/4	2	2	1-1/4	1.77	1.77	2.04	2.25
KRT2X2X1.5B	2 x 2 x 1-1/2	2	2	1-1/2	1.89	1.89	2.07	2.70
KRT2.5X2.5X1.25B	2-1/2 x 2-1/2 x 1-1/4	2-1/2	2-1/2	1-1/4	2.04	2.04	2.45	3.26
KRT2.5X2.5X1.5B	2-1/2 x 2-1/2 x 1-1/2	2-1/2	2-1/2	1-1/2	2.16	2.16	2.51	3.90
KRT2.5X2.5X2B	2-1/2 x 2-1/2 x 2	2-1/2	2-1/2	2	2.39	2.39	2.60	4.24
KRT3X3X.75B	3 x 3 x 3/4	3	3	3/4	1.87	1.87	2.61	4.15
KRT3X3X1B	3 x 3 x 1	3	3	1	2.00	2.00	2.66	4.50
KRT3X3X1.25B	3 x 3 x 1-1/4	3	3	1-1/4	2.17	2.17	2.74	4.70
KRT3X3X1.5B	3 x 3 x 1-1/2	3	3	1-1/2	2.29	2.29	2.80	4.92
KRT3X3X2B	3 x 3 x 2	3	3	2	2.52	2.52	2.89	3.70
KRT3X3X2.5B	3 x 3 x 2-1/2	3	3	2-1/2	2.83	2.83	2.99	5.51
KRT4X4X2B	4 x 4 x 2	4	4	2	2.74	2.74	3.41	7.60
KRT4X4X3B	4 x 4 x 3	4	4	3	3.30	3.30	3.60	10.53

***Bronze castings conform to ASTM B62, UNS Alloy C83600**

***Dimensions conform to ASME B16.5**

***NPT Threads on all fittings conform to ASME B1.20.1**

***Fittings conform to AWWA C800**