




Threaded Reducing Tees

Class 125, Lead Free Bronze

Inches / Pounds

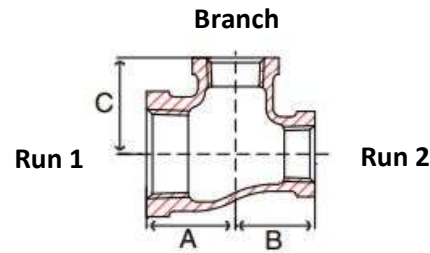

Part #	NPT Thread Sizes (inch)	Run 1 NPT Size	Run 2 NPT Size	Branch NPT Size	End to Center Length (A)	End to Center Length (B)	End to Center Length (C)	Approximate Weight (in Lbs.)
KRT.5X.5.25LB	1/2 x 1/2 x 1/4	1/2	1/2	1/4	0.87	0.87	0.87	0.35
KRT.5X.5X.38LB	1/2 x 1/2 x 3/8	1/2	1/2	3/8	0.93	0.93	0.90	0.43
KRT.75X.75X.25LB	3/4 x 3/4 x 1/4	3/4	3/4	1/4	1.00	1.00	1.00	0.45
KRT.75X.75X.38LB	3/4 x 3/4 x 3/8	3/4	3/4	3/8	1.00	1.00	1.00	0.46
KRT.75X.75X.5LB	3/4 x 3/4 x 1/2	3/4	3/4	1/2	1.08	1.08	1.11	0.58
KRT1X1X.5LB	1 x 1 x 1/2	1	1	1/2	1.20	1.20	1.24	0.83
KRT1X.75X1LB	1 x 3/4 x 1	1	3/4	1	1.43	1.31	1.43	0.85
KRT1X1X.75LB	1 x 1 x 3/4	1	1	3/4	1.30	1.18	1.31	0.72
KRT1.25X1.25X.5LB	1-1/4 x 1-1/4 x 1/2	1-1/4	1-1/4	1/2	1.29	1.29	1.41	0.90
KRT1.25X1.25X.75LB	1-1/4 x 1-1/4 x 3/4	1-1/4	1-1/4	3/4	1.39	1.39	1.48	0.82
KRT1.25X1.25X1LB	1-1/4 x 1-1/4 x 1	1-1/4	1-1/4	1	1.52	1.52	1.60	1.21
KRT1.5X1.5X.75LB	1-1/2 x 1-1/2 x 3/4	1-1/2	1-1/2	3/4	1.42	1.42	1.60	1.25
KRT1.5X1.5X1LB	1-1/2 x 1-1/2 x 1	1-1/2	1-1/2	1	1.55	1.55	1.72	1.71
KRT1.5X1.5X1.25LB	1-1/2 x 1-1/2 x 1-1/4	1-1/2	1-1/2	1-1/4	1.72	1.72	1.81	1.71
KRT2X2X.5LB	2 x 2 x 1/2	2	2	1/2	1.47	1.47	1.84	1.82
KRT2X2X.75LB	2 x 2 x 3/4	2	2	3/4	1.47	1.47	1.84	1.98
KRT2X2X1LB	2 x 2 x 1	2	2	1	1.59	1.59	1.95	2.08
KRT2X2X1.25LB	2 x 2 x 1-1/4	2	2	1-1/4	1.77	1.77	2.04	2.25
KRT2X2X1.5LB	2 x 2 x 1-1/2	2	2	1-1/2	1.89	1.89	2.07	2.70
KRT2.5X2.5X1.25LB	2-1/2 x 2-1/2 x 1-1/4	2-1/2	2-1/2	1-1/4	2.04	2.04	2.45	3.26
KRT2.5X2.5X1.5LB	2-1/2 x 2-1/2 x 1-1/2	2-1/2	2-1/2	1-1/2	2.16	2.16	2.51	3.90
KRT2.5X2.5X2LB	2-1/2 x 2-1/2 x 2	2-1/2	2-1/2	2	2.39	2.39	2.60	4.24
KRT3X3X1.5LB	3 x 3 x 1-1/2	3	3	1-1/2	2.29	2.29	2.80	4.92
KRT3X3X2LB	3 x 3 x 2	3	3	2	2.52	2.52	2.89	3.70

*Lead Free Bronze castings conform to ASTM B584, UNS Alloy C89833

*Dimensions conform to ASME B16.15

*NPT Threads on all fittings conform to ASME B1.20.1

*Fittings conform to AWWA C800

*Certified to ANSI/NSF 372, SWDA and California AB 1953