




Slip-On Reducing Flanges

CLASS 150, Carbon Steel

Inches / Pounds

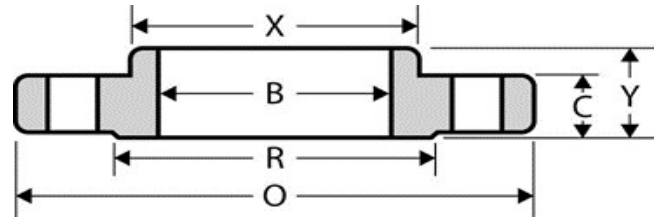

Part #	Flange Mounting Size	NPS Bore Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. Of Bore (B)	No. of Holes	Diam. Of Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
KFSO.75X.5	3/4	1/2	3.88	0.50	1.69	0.88	4	0.62	0.50	2.75	2
KFSO1X.5	1	1/2	4.25	0.56	2.00	0.88	4	0.62	0.50	3.12	2
KFSO1X.75	1	3/4	4.25	0.56	2.00	1.09	4	0.62	0.50	3.12	2
KFSO1.5X.5	1-1/2	1/2	5.00	0.69	2.88	0.88	4	0.62	0.50	3.88	3
KFSO1.5X.75	1-1/2	3/4	5.00	0.69	2.88	1.09	4	0.62	0.50	3.88	3
KFSO1.5X1	1-1/2	1	5.00	0.69	2.88	1.36	4	0.62	0.50	3.88	3
KFSO1.5X1.25	1-1/2	1-1/4	5.00	0.69	2.88	1.70	4	0.62	0.50	3.88	3
KFSO2X1	2	1	6.00	0.75	3.62	1.36	4	0.75	0.62	4.75	4
KFSO2X1.25	2	1-1/4	6.00	0.75	3.62	1.70	4	0.75	0.62	4.75	4
KFSO2X1.5	2	1-1/2	6.00	0.75	3.62	1.95	4	0.75	0.62	4.75	4
KFSO2.5X1	2-1/2	1	7.00	0.88	4.12	1.36	4	0.75	0.62	5.50	7
KFSO2.5X1.25	2-1/2	1-1/4	7.00	0.88	4.12	1.70	4	0.75	0.62	5.50	7
KFSO2.5X1.5	2-1/2	1-1/2	7.00	0.88	4.12	1.95	4	0.75	0.62	5.50	7
KFSO2.5X2	2-1/2	2	7.00	0.88	4.12	2.44	4	0.75	0.62	5.50	7
KFSO3X1	3	1	7.50	0.94	5.00	1.36	4	0.75	0.62	6.00	8
KFSO3X1.25	3	1-1/4	7.50	0.94	5.00	1.70	4	0.75	0.62	6.00	8
KFSO3X1.5	3	1-1/2	7.50	0.94	5.00	1.95	4	0.75	0.62	6.00	8
KFSO3X2	3	2	7.50	0.94	5.00	2.44	4	0.75	0.62	6.00	8
KFSO3X2.5	3	2-1/2	7.50	0.94	5.00	2.94	4	0.75	0.62	6.00	8
KFSO4X1.25	4	1-1/4	9.00	0.94	6.19	1.70	8	0.75	0.62	7.50	17
KFSO4X1.5	4	1-1/2	9.00	0.94	6.19	1.95	8	0.75	0.62	7.50	17
KFSO4X2	4	2	9.00	0.94	6.19	2.44	8	0.75	0.62	7.50	17
KFSO4X2.5	4	2-1/2	9.00	0.94	6.19	2.94	8	0.75	0.62	7.50	17
KFSO4X3	4	3	9.00	0.94	6.19	3.57	8	0.75	0.62	7.50	17
KFSO5X2	5	2	10.00	0.94	7.31	2.44	8	0.88	0.75	8.50	20
KFSO5X2.5	5	2-1/2	10.00	0.94	7.31	2.94	8	0.88	0.75	8.50	20
KFSO5X3	5	3	10.00	0.94	7.31	3.57	8	0.88	0.75	8.50	20
KFSO5X4	5	4	10.00	0.94	7.31	4.57	8	0.88	0.75	8.50	20
KFSO6X2	6	2	11.00	1.00	8.50	2.44	8	0.88	0.75	9.50	26
KFSO6X2.5	6	2-1/2	11.00	1.00	8.50	2.94	8	0.88	0.75	9.50	26
KFSO6X3	6	3	11.00	1.00	8.50	3.57	8	0.88	0.75	9.50	26
KFSO6X4	6	4	11.00	1.00	8.50	4.57	8	0.88	0.75	9.50	26
KFSO6X5	6	5	11.00	1.00	8.50	5.66	8	0.88	0.75	9.50	26


(CONTINUED ON NEXT PAGE)



Slip-On Reducing Flanges

CLASS 150, Carbon Steel

Inches / Pounds

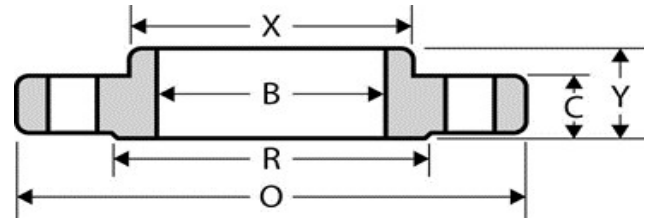

Part #	Flange Mounting Size	NPS Bore Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. Of Bore (B)	No. of Holes	Diam. Of Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
KFSO8X2.5	8	2-1/2	13.50	1.12	10.62	2.94	8	0.88	0.75	11.75	45
KFSO8X3	8	3	13.50	1.12	10.62	3.57	8	0.88	0.75	11.75	45
KFSO8X4	8	4	13.50	1.12	10.62	4.57	8	0.88	0.75	11.75	45
KFSO8X5	8	5	13.50	1.12	10.62	5.66	8	0.88	0.75	11.75	45
KFSO8X6	8	6	13.50	1.12	10.62	8.72	8	0.88	0.75	11.75	40
KFSO10X4	10	4	16.00	1.19	12.75	4.57	12	1.00	0.88	14.25	70
KFSO10X6	10	6	16.00	1.19	12.75	5.66	12	1.00	0.88	14.25	70
KFSO10X8	10	8	16.00	1.19	12.75	8.72	12	1.00	0.88	14.25	70
KFSO12X5	12	5	19.00	1.25	15.00	5.66	12	1.00	0.88	17.00	64
KFSO12X6	12	6	19.00	1.25	15.00	5.66	12	1.00	0.88	17.00	110
KFSO12X8	12	8	19.00	1.25	15.00	8.72	12	1.00	0.88	17.00	110
KFSO12X10	12	10	19.00	1.25	15.00	10.88	12	1.00	0.88	17.00	110

* Dimensions conform to ASME B16.5

* Forged carbon steel material conforms to ASTM A/SA-105