




Threaded Reducing Flanges

CLASS 150, Carbon Steel

Inches / Pounds

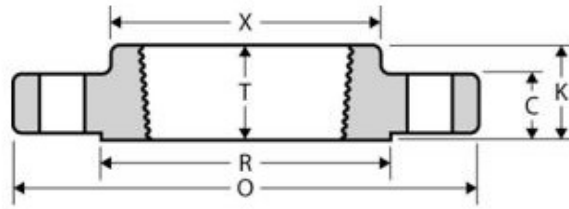

Part #	Flange Mounting Size	NPT Bore Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub (X)	Min. Thread Length (T)	No. of Holes	Diam. of Holes	Diam. of Bolts	Diam. of Bolt Circle	Approx. Weight (LBS)
KTF.75X.5	3/4	1/2	3.88	0.50	1.69	1.19	0.62	4	0.62	0.50	2.75	2
KTF1X.5	1	1/2	4.25	0.56	2.00	1.19	0.62	4	0.62	0.50	3.12	2
KTF1X.75	1	3/4	4.25	0.56	2.00	1.50	0.62	4	0.62	0.50	3.12	2
KTF1.25X.5	1-1/4	1/2	4.62	0.62	2.50	1.19	0.62	4	0.62	0.50	3.50	3
KTF1.25X.75	1-1/4	3/4	4.62	0.62	2.50	1.50	0.62	4	0.62	0.50	3.50	3
KTF1.25X1	1-1/4	1	4.62	0.62	2.50	1.94	0.69	4	0.62	0.50	3.50	3
KTF1.5X.5	1-1/2	1/2	5.00	0.69	2.88	1.19	0.62	4	0.62	0.50	3.88	3
KTF1.5X.75	1-1/2	3/4	5.00	0.69	2.88	1.50	0.62	4	0.62	0.50	3.88	3
KTF1.5X1	1-1/2	1	5.00	0.69	2.88	1.94	0.69	4	0.62	0.50	3.88	3
KTF1.5X1.25	1-1/2	1-1/4	5.00	0.69	2.88	2.31	0.81	4	0.62	0.50	3.88	3
KTF2X.5	2	1/2	6.00	0.75	3.62	1.19	0.62	4	0.75	0.62	4.75	4
KTF2X.75	2	3/4	6.00	0.75	3.62	1.50	0.62	4	0.75	0.62	4.75	4
KTF2X1	2	1	6.00	0.75	3.62	1.94	0.69	4	0.75	0.62	4.75	4
KTF2X1.25	2	1-1/4	6.00	0.75	3.62	2.31	0.81	4	0.75	0.62	4.75	4
KTF2X1.5	2	1-1/2	6.00	0.75	3.62	2.56	0.88	4	0.75	0.62	4.75	4
KTF2.5X.75	2	3/4	7.00	0.88	4.12	1.50	0.62	4	0.75	0.62	5.50	7
KTF2.5X1	2-1/2	1	7.00	0.88	4.12	1.94	0.69	4	0.75	0.62	5.50	7
KTF2.5X1.25	2-1/2	1-1/4	7.00	0.88	4.12	2.31	0.81	4	0.75	0.62	5.50	7
KTF2.5X1.5	2-1/2	1-1/2	7.00	0.88	4.12	2.56	0.88	4	0.75	0.62	5.50	7
KTF2.5X2	2-1/2	2	7.00	0.88	4.12	3.06	1.00	4	0.75	0.62	5.50	7
KTF3X.5	3	1/2	7.50	0.94	5.00	1.19	0.62	4	0.75	0.62	6.00	8
KTF3X.75	3	3/4	7.50	0.94	5.00	1.50	0.62	4	0.75	0.62	6.00	8
KTF3X1	3	1	7.50	0.94	5.00	1.94	0.69	4	0.75	0.62	6.00	8
KTF3X1.25	3	1-1/4	7.50	0.94	5.00	2.31	0.81	4	0.75	0.62	6.00	8
KTF3X1.5	3	1-1/2	7.50	0.94	5.00	2.56	0.88	4	0.75	0.62	6.00	8
KTF3X2	3	2	7.50	0.94	5.00	3.06	1.00	4	0.75	0.62	6.00	8
KTF3X2.5	3	2-1/2	7.50	0.94	5.00	3.56	1.12	4	0.75	0.62	6.00	8
KTF4X.5	4	1/2	9.00	0.94	6.19	1.19	0.62	8	0.75	0.62	7.50	17
KTF4X.75	4	3/4	9.00	0.94	6.19	1.50	0.62	8	0.75	0.62	7.50	17
KTF4X1	4	1	9.00	0.94	6.19	1.94	0.69	8	0.75	0.62	7.50	17
KTF4X1.25	4	1-1/4	9.00	0.94	6.19	2.31	0.81	8	0.75	0.62	7.50	17
KTF4X1.5	4	1-1/2	9.00	0.94	6.19	2.56	0.88	8	0.75	0.62	7.50	17
KTF4X2	4	2	9.00	0.94	6.19	3.06	1.00	8	0.75	0.62	7.50	17
KTF4X2.5	4	2-1/2	9.00	0.94	6.19	3.56	1.12	8	0.75	0.62	7.50	17
KTF4X3	4	3	9.00	0.94	6.19	4.25	1.19	8	0.75	0.62	7.50	17

(CONTINUED ON NEXT PAGE)

Pipe Fittings Direct

690 Craig Rd

Edgerton, WI 53534


Phone: (608) 371-9313

Email: sales@pipefittingsdirect.com

Threaded Reducing Flanges

CLASS 150, Carbon Steel

Inches / Pounds

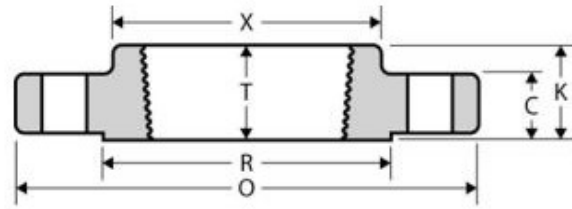

Part #	Flange Mounting Size	NPT Bore Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. Of Hub (X)	Min. Thread Length (T)	No. of Holes	Diam. Of Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (LBS)
KTF5X2	5	2	10.00	0.94	7.31	3.06	1.00	8	0.88	0.75	8.50	20
KTF5X2.5	5	2-1/2	10.00	0.94	7.31	3.56	1.12	8	0.88	0.75	8.50	20
KTF5X3	5	3	10.00	0.94	7.31	4.25	1.19	8	0.88	0.75	8.50	20
KTF5X4	5	4	10.00	0.94	7.31	5.31	1.31	8	0.88	0.75	8.50	20
KTF6X2	6	2	11.00	1.00	8.50	3.06	1.00	8	0.88	0.75	9.50	26
KTF6X2.5	6	2-1/2	11.00	1.00	8.50	3.56	1.12	8	0.88	0.75	9.50	26
KTF6X3	6	3	11.00	1.00	8.50	4.25	1.19	8	0.88	0.75	9.50	26
KTF6X4	6	4	11.00	1.00	8.50	5.31	1.31	8	0.88	0.75	9.50	26
KTF6X5	6	5	11.00	1.00	8.50	6.44	1.44	8	0.88	0.75	9.50	26
KFSO8X2	8	2	13.50	1.12	10.62	3.06	1.00	8	0.88	0.75	11.75	45
KFSO8X3	8	3	13.50	1.12	10.62	4.25	1.19	8	0.88	0.75	11.75	45
KFSO8X4	8	4	13.50	1.12	10.62	5.31	1.31	8	0.88	0.75	11.75	45
KFSO8X5	8	5	13.50	1.12	10.62	6.44	1.44	8	0.88	0.75	11.75	45
KFSO8X6	8	6	13.50	1.12	10.62	7.56	1.56	8	0.88	0.75	11.75	40
KFSO10X4	10	4	16.00	1.19	12.75	5.31	1.31	12	1.00	0.88	14.25	70
KFSO10X8	10	8	16.00	1.19	12.75	9.69	1.75	12	1.00	0.88	14.25	70
KFSO12X8	12	8	19.00	1.25	15.00	9.69	1.75	12	1.00	0.88	17.00	110

* Dimensions conform to ASME B16.5; Threading per ASME B1.20.1

* Forged carbon steel material conforms to ASTM A/SA-105