


Flanged Concentric Reducers

CLASS 125/150, Cast Iron/Ductile Iron

Inches / Pounds



Part #	NPS Size (1)	NPS Size (2)	Pressure Class (#)	Overall Length (F)	Estimated Weight (LBS)
KFCR2.5X2	2 ½	2	150	5.50	13
KFCR3X2	3	2	150	6.00	15
KFCR3X2.5	3	2 ½	150	6.00	18
KFCR4X2	4	2	150	7.00	23
KFCR4X2.5	4	2 ½	150	7.00	26
KFCR4X3	4	3	150	7.00	30
KFCR5X3	5	3	150	8.00	33
KFCR5X4	5	4	150	8.00	39
KFCR6X3	6	3	150	9.00	38
KFCR6X4	6	4	150	9.00	46
KFCR6X5	6	5	150	9.00	48
KFCR8X4	8	4	150	11.00	65
KFCR8X5	8	5	150	11.00	71
KFCR8X6	8	6	150	11.00	78
KFCR10X6	10	6	150	12.00	100
KFCR10X8	10	8	125	12.00	120
KFCR12X8	12	8	125	14.00	155
KFCR12X10	12	10	125	14.00	180
KFCR14X10	14	10	125	16.00	190
KFCR14X12	14	12	125	16.00	220
KFCR16X12	16	12	125	18.00	265

Class 150 Ductile Iron Material conforms to ASTM A536; Dimensions per ASME B16.42

Class 125 Cast Iron Material conforms to ASTM A126; Dimensions per ASME B16.1


SEE NEXT PAGE FOR FLANGE DIMENSIONS



Flanged Concentric Reducers

CLASS 125/150, Cast Iron/Ductile Iron

Inches / Pounds

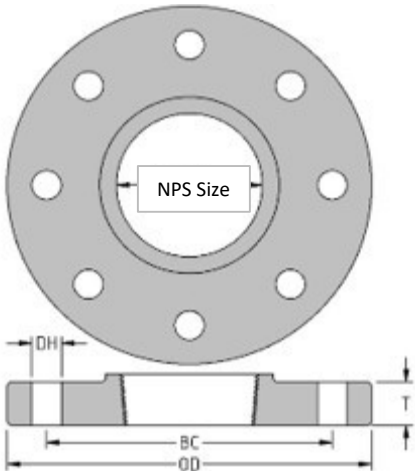

NPS Size (Flange)	Diameter Bolt Hole (DH)	# of Bolt Holes	Outside Diameter (OD)	Bolt Circle Diameter (BC)	Flange Thickness (T)
2	0.75	4	6.00	4.75	0.62
2 1/2	0.75	4	7.00	5.50	0.69
3	0.75	4	7.50	6.00	0.75
4	0.75	8	9.00	7.50	0.94
5	0.88	8	10.00	8.50	0.94
6	0.88	8	11.00	9.50	1.00
8	0.88	8	13.50	11.75	1.12
10	1.00	12	16.00	14.25	1.19
12	1.00	12	19.00	17.00	1.25
14	1.12	12	21.00	18.75	1.38
16	1.12	16	21.25	21.25	1.44

* Dimensions conform to ASME B16.1
* Flat face