




Flanged Eccentric Reducers

CLASS 125/150, Cast Iron/Ductile Iron

Inches / Pounds



Part #	NPS Size (1)	NPS Size (2)	Pressure Class (#)	Overall Length (F)	Estimated Weight (LBS)
KFER3X2	3	2	150	6.00	15
KFER3X2.5	3	2 ½	150	6.00	18
KFER4X2.5	4	2 ½	150	7.00	26
KFER4X3	4	3	150	7.00	30
KFER6X3	6	3	150	9.00	38
KFER6X4	6	4	150	9.00	46
KFER6X5	6	5	150	9.00	48
KFER8X4	8	4	150	11.00	65
KFER8X6	8	6	150	11.00	78
KFER10X6	10	6	150	12.00	100
KFER10X8	10	8	125	12.00	120
KFER12X10	12	10	125	14.00	180

Class 150 Ductile Iron Material conforms to ASTM A536; Dimensions per ASME B16.42

Class 125 Cast Iron Material conforms to ASTM A126; Dimensions per ASME B16.1


SEE NEXT PAGE FOR FLANGE DIMENSIONS



Flanged Concentric Reducers

CLASS 125/150, Cast Iron/Ductile Iron

Inches / Pounds

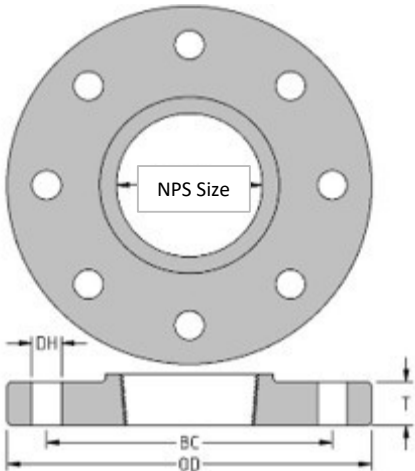

NPS Size (Flange)	Diameter Bolt Hole (DH)	# of Bolt Holes	Outside Diameter (OD)	Bolt Circle Diameter (BC)	Flange Thickness (T)
2	0.75	4	6.00	4.75	0.62
2 ½	0.75	4	7.00	5.50	0.69
3	0.75	4	7.50	6.00	0.75
4	0.75	8	9.00	7.50	0.94
5	0.88	8	10.00	8.50	0.94
6	0.88	8	11.00	9.50	1.00
8	0.88	8	13.50	11.75	1.12
10	1.00	12	16.00	14.25	1.19
12	1.00	12	19.00	17.00	1.25

* Dimensions conform to ASME B16.1
* Flat face