




Slip On Plate Flanges - Pipe ID

Class 150 spaced, 316 SS

Inches / Pounds

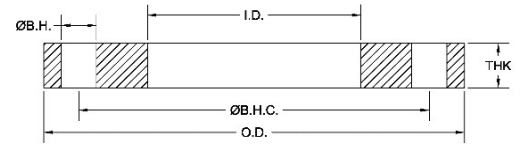

Part #	NPS Size	Inside Diameter (I.D.)	Outside Diameter (O.D.)	Bolt Hole Center Diameter (B.H.C.)	Bolt Hole Diameter (B.H.)	Flange Thickness (THK)	Number of Bolt Holes	Est Weight
PFDW1PSS	1	1.36	4.25	3.12	0.625	0.5	4	1.7
PFDW1.5PSS	1-1/2	1.95	5.0	3.88	0.625	0.5	4	2.3
PFDW2PSS	2	2.44	6.0	4.75	0.75	0.5	4	3.2
PFDW2.5PSS	2.5	2.94	7.0	5.50	0.75	0.5	4	4.5
PFDW3PSS	3	3.57	7.5	6.00	0.75	0.5	4	4.8
PFDW4PSS	4	4.57	9.0	7.50	0.75	0.5	8	6.5
PFDW5PSS	5	5.66	10.0	8.50	0.88	0.5	8	7.3
PFDW6PSS	6	6.72	11.0	9.50	0.88	0.5	8	8.2
PFDW8PSS	8	8.72	13.5	11.75	0.88	0.5	8	11.8
PFDHW8PSS	8	8.72	13.5	11.75	0.88	0.75	8	14.2
PFDW10PSS	10	10.88	16.0	14.25	1	0.63	12	15
PFDHW10PSS	10	10.88	16.0	14.25	1	0.75	12	18
PFDW12PSS	12	12.88	19.0	17	1	0.63	12	21
PFDHW12PSS	12	12.88	19.0	17	1	0.75	12	26
PFDW14SS	14	14.14	21.0	18.75	1.12	0.63	12	26.5
PFDHW14SS	14	14.14	21.0	18.75	1.12	0.75	12	31.6
PFDW16SS	16	16.16	23.5	21.25	1.12	0.75	16	37
PFDW18SS	18	18.18	25.0	22.75	1.25	0.75	16	42

* Constructed of ASTM A240 304 stainless plate steel or cast in conformance with ASTM A351

* Spacing per ASME B16.5 Class 150, **except for thickness**