




Slip-On Flange, Class 300

Forged 304 Stainless Steel

Inches / Pounds

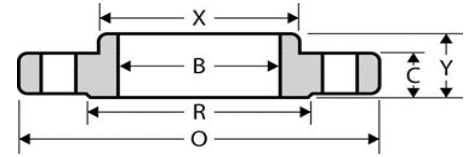

Part #	Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub at Base (X)	Length thru Hub (Y)	Diam. Of Bore (B)	No. of Bolt Holes	Diam. Of Bolt Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
K3FSO.5S	1/2	3.75	0.56	1.38	1.50	0.88	0.88	4	0.62	0.50	2.62	2
K3FSO1S	1	4.88	0.69	2.00	2.12	1.06	1.36	4	0.75	0.62	3.50	3
K3FSO1.25S	1 1/4	5.25	0.75	2.50	2.50	1.06	1.70	4	0.75	0.62	3.88	4
K3FSO1.5S	1 1/2	6.12	0.81	2.88	2.75	1.19	1.95	4	0.88	0.75	4.50	6
K3FSO2S	2	6.50	0.88	3.62	3.31	1.31	2.44	8	0.75	0.62	5.00	7
K3FSO2.5S	2 1/2	7.50	1.00	4.12	3.94	1.50	2.94	8	0.88	0.75	5.88	10
K3FSO3S	3	8.25	1.12	5.00	4.62	1.69	3.57	8	0.88	0.75	6.62	13
K3FSO4S	4	10.00	1.25	6.19	5.75	1.88	4.57	8	0.88	0.75	7.88	22

*** Dimensions conform to ASME B16.5**

*** Forged 304 Stainless Steel material conforms to ASTM A182**