




Slip-On Flange, Class 300

Forged 316 Stainless Steel

Inches / Pounds

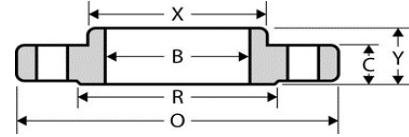

Part #	Nomin al Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub at Base (X)	Length thru Hub (Y)	Diam. Of Bore (B)	No. of Bolt Holes	Diam. Of Bolt Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
K3FSO.5SS	½	3.75	0.56	1.38	1.50	0.88	0.88	4	0.62	0.50	2.62	2
K3FSO1SS	1	4.88	0.69	2.00	2.12	1.06	1.36	4	0.75	0.62	3.50	3
K3FSO1.25SS	1 ¼	5.25	0.75	2.50	2.50	1.06	1.70	4	0.75	0.62	3.88	4
K3FSO1.5SS	1 ½	6.12	0.81	2.88	2.75	1.19	1.95	4	0.88	0.75	4.50	6
K3FSO2SS	2	6.50	0.88	3.62	3.31	1.31	2.44	8	0.75	0.62	5.00	7
K3FSO2.5SS	2 ½	7.50	1.00	4.12	3.94	1.50	2.94	8	0.88	0.75	5.88	10
K3FSO3SS	3	8.25	1.12	5.00	4.62	1.69	3.57	8	0.88	0.75	6.62	13
K3FSO4SS	4	10.00	1.25	6.19	5.75	1.88	4.57	8	0.88	0.75	7.88	22

*** Dimensions conform to ASME B16.5**

*** Forged 316 Stainless Steel material conforms to ASTM A182**