




# Slip-On Flange

## CLASS 150

Inches / Pounds

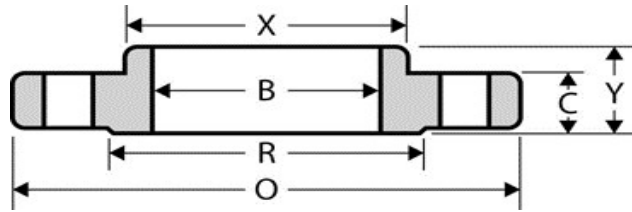

Part #	Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub at Base (X)	Length thru Hub (Y)	Diam. Of Bore (B)	No. of Holes	Diam. Of Holes	Diam. Of Bolts	Diam. Of Bolt Circle	Approx. Weight (in Lbs.)
KFSO.5	1/2	3.50	0.44	1.38	1.19	0.62	0.88	4	0.62	0.50	2.38	1
KFSO.75	3/4	3.88	0.50	1.69	1.50	0.62	1.09	4	0.62	0.50	2.75	2
KF1SO	1	4.25	0.56	2.00	1.94	0.69	1.36	4	0.62	0.50	3.12	2
KFSO1.25	1 1/4	4.62	0.62	2.50	2.31	0.81	1.70	4	0.62	0.50	3.50	3
KFSO1.5	1 1/2	5.00	0.69	2.88	2.56	0.88	1.95	4	0.62	0.50	3.88	3
KFSO2	2	6.00	0.75	3.62	3.06	1.00	2.44	4	0.75	0.62	4.75	5
KFSO2.5	2 1/2	7.00	0.88	4.12	3.56	1.12	2.94	4	0.75	0.62	5.50	7
KFSO3	3	7.50	0.94	5.00	4.25	1.19	3.57	4	0.75	0.62	6.00	8
KFSO3.5	3 1/2	8.50	0.94	5.50	4.81	1.25	4.07	8	0.75	0.62	7.00	11
KFSO4	4	9.00	0.94	6.19	5.31	1.31	4.57	8	0.75	0.62	7.50	13
KFSO5	5	10.00	0.94	7.31	6.44	1.44	5.66	8	0.88	0.75	8.50	15
KFSO6	6	11.00	1.00	8.50	7.56	1.56	6.72	8	0.88	0.75	9.50	19
KFSO8	8	13.50	1.12	10.62	9.69	1.75	8.72	8	0.88	0.75	11.75	30
KFSO10	10	16.00	1.19	12.75	12.00	1.94	10.88	12	1.00	0.88	14.25	43
KFSO12	12	19.00	1.25	15.00	14.38	2.19	12.88	12	1.00	0.88	17.00	64
KFSO14	14	21.00	1.38	16.25	15.75	2.25	14.14	12	1.12	1.00	18.75	90
KFSO16	16	23.50	1.44	18.50	18.00	2.50	16.16	16	1.12	1.00	21.25	98
KFSO18	18	25.00	1.56	21.00	19.88	2.69	18.18	16	1.25	1.12	22.75	130
KFSO20	20	27.50	1.69	23.00	22.00	2.88	20.20	20	1.25	1.12	25.00	165
KFSO24	24	32.00	1.88	27.25	26.12	3.25	24.25	20	1.38	1.25	29.50	220

*\* Dimensions conform to ASTM A/SA-105; ANSI B16.5*