




Weld on Reducing Tees

Schedule 10, 316 Stainless Steel

Inches / Pounds

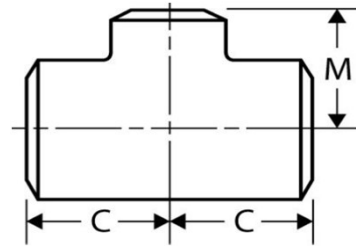

Part #	Nominal Pipe Size	Outside Diam. (C)	Wall Thickness (C)	Inside Diam. (C)	Center to Center (C)	Outside Diam. (M)	Wall Thickness (M)	Inside Diam. (M)	Center to Center (M)	Pipe Schedule	Approx. Weight (in Lbs.)
K10RT.75X.5SS	¾ x ½	1.05	0.083	0.884	1.13	0.840	0.083	0.674	1.13	10	0.2
K10RT1X.5SS	1 x ½	1.32	0.109	1.10	1.50	0.840	0.083	0.674	1.50	10	0.5
K10RT1X.75SS	1 x ¾	1.32	0.109	1.10	1.50	1.05	0.083	0.884	1.50	10	0.5
K10RT1.25X.75SS	1 ¼ x ¾	1.66	0.109	1.44	1.88	1.05	0.083	0.884	1.88	10	0.9
K10RT1.25X1SS	1 ¼ x 1	1.66	0.109	1.44	1.88	1.32	0.109	1.102	1.88	10	0.9
K10RT1.5X.5SS	1 ½ x ½	1.90	0.109	1.68	2.25	0.84	0.083	0.674	2.25	10	1.2
K10RT1.5X.75SS	1 ½ x ¾	1.90	0.109	1.68	2.25	1.05	0.083	0.884	2.25	10	1.2
K10RT1.5X1SS	1 ½ x 1	1.90	0.109	1.68	2.25	1.32	0.109	1.102	2.25	10	1.3
K10RT1.5X1.25SS	1 ½ x 1 ¼	1.90	0.109	1.68	2.25	1.66	0.109	1.442	2.25	10	1.3
K10RT2X.75SS	2 x ¾	2.38	0.109	2.16	2.50	1.05	0.083	0.884	1.75	10	1.5
K10RT2X1SS	2 x 1	2.38	0.109	2.16	2.50	1.32	0.109	1.102	2.00	10	1.6
K10RT2X1.25SS	2 x 1 ¼	2.38	0.109	2.16	2.50	1.66	0.109	1.442	2.25	10	1.6
K10RT2X1.5SS	2 x 1 ½	2.38	0.109	2.16	2.50	1.90	0.109	1.682	2.38	10	1.6
K10RT2.5X1SS	2 ½ x 1	2.88	0.120	2.64	3.00	1.32	0.109	1.102	2.25	10	2.6
K10RT2.5X1.5SS	2 ½ x 1 ½	2.88	0.120	2.64	3.00	1.90	0.109	1.682	2.63	10	2.7
K10RT2.5X2SS	2 ½ x 2	2.88	0.120	2.64	3.00	2.38	0.109	2.162	2.75	10	2.7
K10RT3X1SS	3 x 1	3.50	0.120	3.26	3.38	1.315	0.109	1.097	2.63	10	3.2
K10RT3X1.25SS	3 x 1 ¼	3.50	0.120	3.26	3.38	1.66	0.109	1.442	2.75	10	3.3
K10RT3X1.5SS	3 x 1 ½	3.50	0.120	3.26	3.38	1.90	0.109	1.682	2.88	10	3.3
K10RT3X2SS	3 x 2	3.50	0.120	3.26	3.38	2.38	0.109	2.162	3.00	10	3.4
K10RT3X2.5SS	3 x 2 ½	3.50	0.120	3.26	3.38	2.88	0.120	2.640	3.25	10	3.5
K10RT4X2SS	4 x 2	4.50	0.120	4.26	4.13	2.38	0.109	2.162	3.25	10	6.4
K10RT4X2.5SS	4 x 2 ½	4.50	0.120	4.26	4.13	2.875	0.120	2.635	3.75	10	6.5
K10RT4X3SS	4 x 3	4.50	0.120	4.26	4.13	3.50	0.120	3.260	3.88	10	6.7
K10RT5X4SS	5 x 4	5.56	0.134	5.29	4.88	4.50	0.120	4.260	4.63	10	12.1
K10RT6X3SS	6 x 3	6.62	0.134	6.35	5.63	3.50	0.120	3.260	4.88	10	15.1
K10RT6X4SS	6 x 4	6.62	0.134	6.35	5.63	4.50	0.120	4.260	5.13	10	15.6
K10RT6X5SS	6 x 5	6.62	0.134	6.35	5.63	5.62	0.134	5.352	5.38	10	15.7

* Material conforms to ASTM A403 Grade 316/316L, ASTM A960, MSS SP-43

* Dimensions conform to ASME B16.9 (except Wall) and MSS SP-43