




Companion Flange, NPT Threaded

CLASS 125, Cast Iron

GALVANIZED

Inches / Pounds

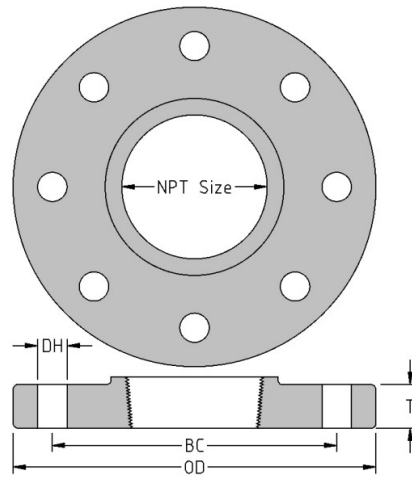

Part #	NPT Bore Size	Diameter Bolt Hole (DH)	# of Bolt Holes	Outside Diameter (OD)	Bolt Circle Diameter (BC)	Flange Thickness (T)	Weight (LBS)
KCTF1G	1	0.62	4	4.25	3.12	0.44	1
KCTF1.25G	1 ¼	0.62	4	4.62	3.50	0.50	2
KCTF1.5G	1 ½	0.62	4	5.00	3.88	0.56	3
KCTF2G	2	0.75	4	6.00	4.75	0.62	4
KCTF2.5G	2 ½	0.75	4	7.00	5.50	0.69	6
KCTF3G	3	0.75	4	7.50	6.00	0.75	8
KCTF4G	4	0.75	8	9.00	7.50	0.94	12
KCTF5G	5	0.88	8	10.00	8.50	0.94	14
KCTF6G	6	0.88	8	11.00	9.50	1.00	16
KCTF8G	8	0.88	8	13.50	11.75	1.12	28

** Dimensions conform to ASME B16.1; Threading per ANSI/ASME B1.20.1*

** Material conforms to ASTM A126*

** Flat face*

**Hot Dipped Galvanized*