




Threaded Flange

CLASS 150, Ductile Iron

Inches / Pounds

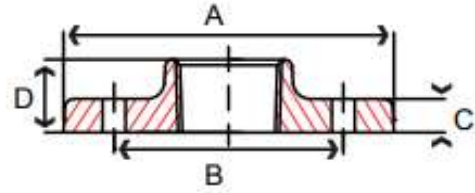

Part #	Nominal Pipe Size	Outside Diam. of Flange (A)	Thick. of Flange (C)	Length thru Hub (D)	No. Of Holes	Diam. Of Holes	Diam. Of Bolt Holes	Diam. Of Bolt Circle (B)	Approx. Weight (in Lbs.)
KTF1DI	1	4.25	0.44	0.75	4	0.62	0.63	3.12	1
KTF1.25DI	1 ¼	4.62	0.50	0.81	4	0.62	0.63	3.50	2
KTF1.5DI	1 ½	5.00	0.56	0.88	4	0.62	0.63	3.88	3
KTF2DI	2	6.00	0.62	1.00	4	0.75	0.75	4.75	4
KTF2.5DI	2 ½	7.00	0.69	1.12	4	0.75	0.75	5.50	6
KTF3DI	3	7.50	0.75	1.19	4	0.75	0.75	6.00	8
KTF4DI	4	9.00	0.94	1.31	8	0.75	0.75	7.50	12
KTF5DI	5	10.00	0.94	1.44	8	0.88	0.88	8.50	14
KTF6DI	6	11.00	1.00	1.56	8	0.88	0.88	9.50	16
KTF8DI	8	13.50	1.12	1.75	8	0.88	0.88	11.75	28
KTF10DI	10	16.00	1.19	1.94	12	0.88	1.00	14.25	38
KTF12DI	12	19.00	1.25	2.19	12	0.88	1.00	17.00	55

* Dimensions, drilling and materials in accordance with AWWA C110/ASME B16.42

* Ductile iron conform to ASTM A536

* Threads conform to ASME B1.20.1