




Slip On Plate Flanges - Tube ID

Class 150 spaced, 304 SS

Inches / Pounds

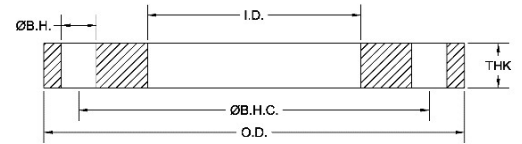

Part #	Tube Size	Inside Diameter (I.D.)	Outside Diameter (O.D.)	Bolt Hole Center Diameter (B.H.C.)	Bolt Hole Diameter (B.H.)	Flange Thickness (THK)	Number of Bolt Holes	Est Weight
KL1TS	1	1.063	4.25	3.12	0.625	0.5	4	1.7
KL1.5TS	1.5	1.563	5.0	3.88	0.625	0.5	4	2.3
KL2TS	2	2.063	6.0	4.75	0.75	0.5	4	3.2
KL2.5TS	2.5	2.563	7.0	5.50	0.75	0.5	4	4.5
KL3TS	3	3.063	7.5	6.00	0.75	0.5	4	4.8
KL4TS	4	4.063	9.0	7.50	0.75	0.5	8	6.5
KL6TS	6	6.063	11.0	9.50	0.88	0.5	8	8.2
KL8TS	8	8.063	13.5	11.75	0.88	0.5	8	11.8
KL10TS	10	10.063	16.0	14.25	1	0.5	12	14.7
KL12TS	12	12.063	19.0	17.00	1	0.5	12	18.2

* Constructed of ASTM A240 304 stainless plate steel or cast in conformance with ASTM A351

* Spacing per ASME B16.5 Class 150, **except for thickness**