




CLASS 300, Carbon Steel

Inches / Pounds

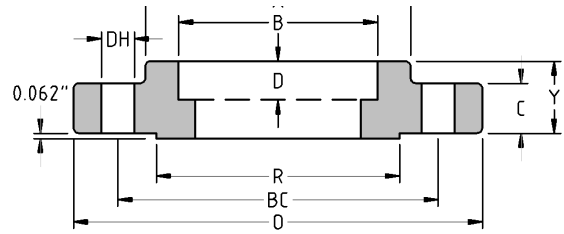

Part #	Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	Diam. of Hub at Base (X)	Length thru Hub (Y)	Diam. of Bore (B)	Depth of Socket (D)	No. of Holes	Diam. of Holes (DH)	Diam. of Bolts	Diam. of Bolt Circle (BC)	Approx. Weight (in Pounds)
K380FSW.25	1/2	3.75	0.50	1.38	1.50	0.88	0.88	0.38	4	0.62	0.50	2.62	2
K380FSW.75	3/4	4.62	0.56	1.69	1.88	1.00	1.09	0.44	4	0.75	0.62	3.25	3
K380FISW	1	4.88	0.63	2.00	2.12	1.06	1.36	0.50	4	0.75	0.62	3.50	3
K380FSW1.25	1 1/4	5.25	0.69	2.50	2.50	1.06	1.70	0.56	4	0.75	0.62	3.88	4
K380FSW1.5	1 1/2	6.12	0.75	2.88	2.75	1.19	1.95	0.62	4	0.88	0.75	4.50	6
K380FSW2	2	6.50	0.82	3.62	3.31	1.31	2.44	0.69	8	0.75	0.62	5.00	7
K380FSW2.5	2 1/2	7.50	0.94	4.12	3.94	1.50	2.94	0.75	8	0.88	0.75	5.88	10
K380FSW3	3	8.25	1.06	5.00	4.62	1.69	3.57	0.81	8	0.88	0.75	6.62	13
K380FSW3.5	3 1/2	9.00	1.13	5.50	5.25	1.75	4.07	—	8	0.88	0.75	7.25	17
K380FSW4	4	10.00	1.19	6.19	5.75	1.88	4.57	—	8	0.88	0.75	7.88	22

* Dimensions conform to ASME B16.5

* Forged material conforms to ASTM A/SA-105